

EXTREME[®] MICROCOIL[®] GRILLE


CLOPAY COMMERCIAL – MODELS CEPG324C, CEPG324CB



MEASURE THE WIDTH AND HEIGHT OF THE OPENING

STAINLESS STEEL CURTAIN

DOOR SIZE AND AREA

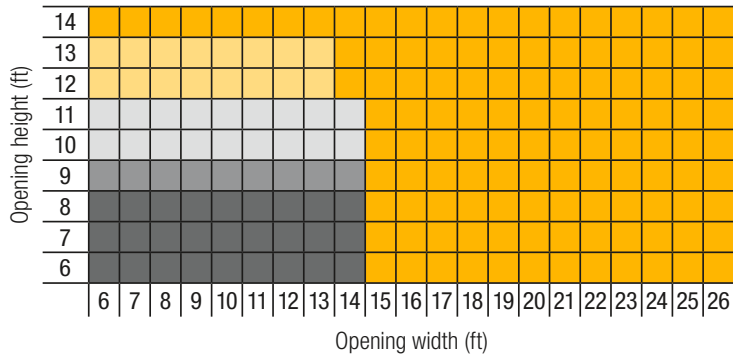


COMPONENT DIMENSIONS

	A	B	C	D	E
	10-1/2"	12-1/2"	FOW = 5-3/4" BJ = 5-3/4"	FOW = 12-3/4" BJ = 13-1/2"	2" ^{**}
	10-3/4"	12-3/4"			
	11"	13"			
	11-1/2"	13-1/4"			
	11-3/4"	13-3/4"			


*Dimension is 3" if a sensing edge is present.

ALUMINUM CURTAIN

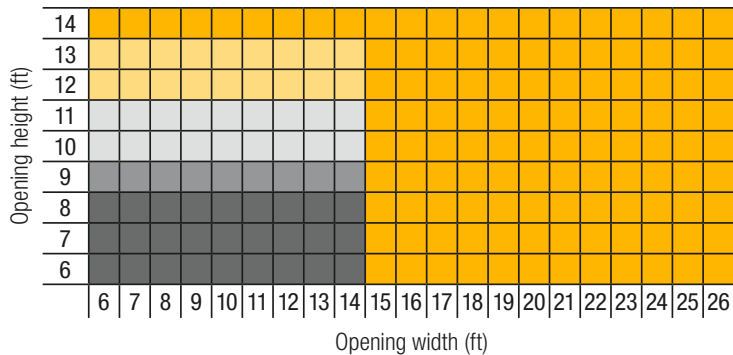


	A	B	C	D	E
	10-1/2"	12-1/2"	FOW = 6" BJ = 6"	FOW = 13-1/4" BJ = 13-3/4"	2" ^{**}
	10-3/4"	12-3/4"			
	11"	13"			
	11-1/2"	13-1/4"			
	11-3/4"	13-3/4"			

*Dimension is 3" if a sensing edge is present.

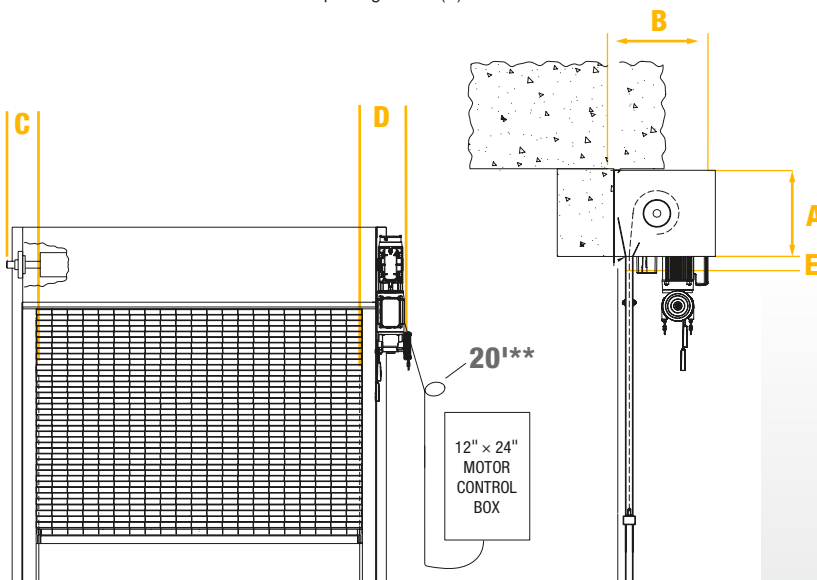

**Additional lengths are available, please contact the factory.

CURTAIN DESIGNS

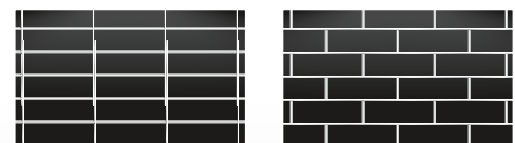

Straight

Brick


The dimensions featured on this sheet are provided as a rough guide for planning purposes. Exact dimensions cannot be provided until field conditions and all options are confirmed.

FACE OF WALL GUIDE CONSTRUCTION OPTIONS

STAINLESS STEEL


Z GUIDE

Typically used with masonry wall construction, guides are mounted to the interior or exterior side of the wall.

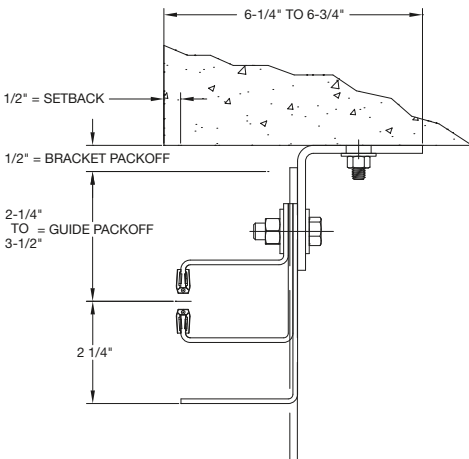


E GUIDE


Typically used with steel jambs, guides are mounted to the interior or exterior side of the wall.

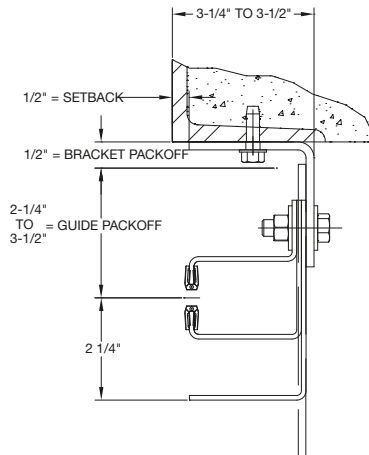

Z GUIDE TO TUBE

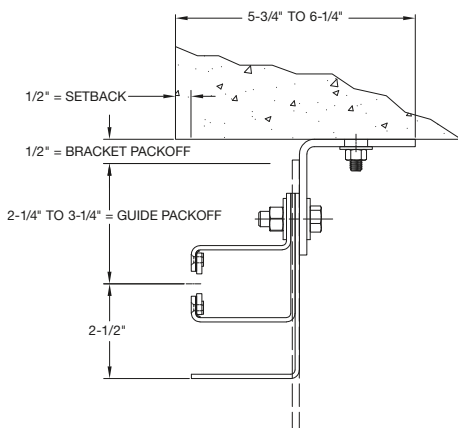


E GUIDE TO TUBE

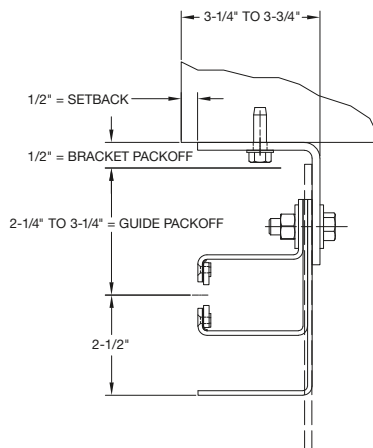

BOTTOM BAR

Compact stainless steel 300 series in #4 finish.

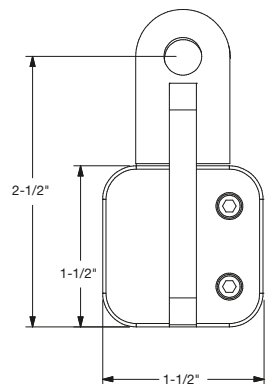


The dimensions featured on this sheet are provided as a rough guide for planning purposes. Exact dimensions cannot be provided until field conditions and all options are confirmed.

FACE OF WALL GUIDE CONSTRUCTION OPTIONS

ALUMINUM


Z GUIDE

Typically used with masonry wall construction, guides are mounted to the interior or exterior side of the wall.

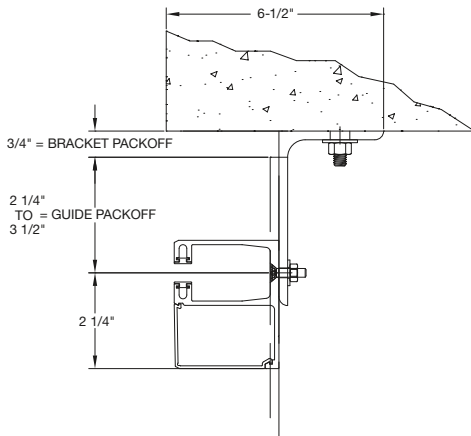


E GUIDE


Typically used with steel jambs, guides are mounted to the interior or exterior side of the wall.

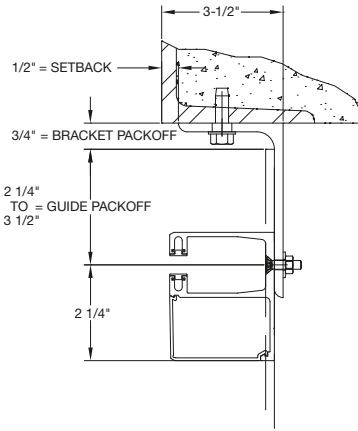

Z GUIDE TO TUBE

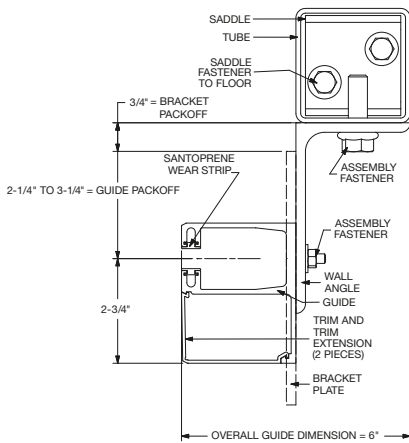


E GUIDE TO TUBE


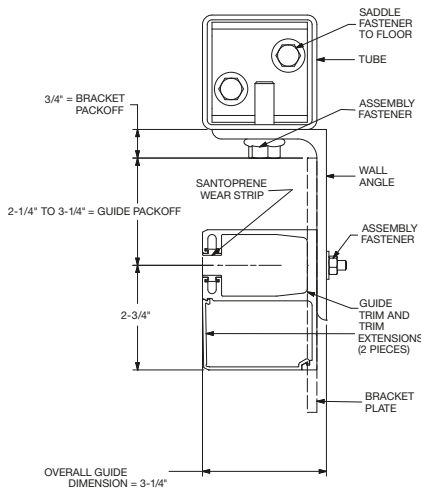


BOTTOM BAR

Compact extruded aluminum in mill finish.

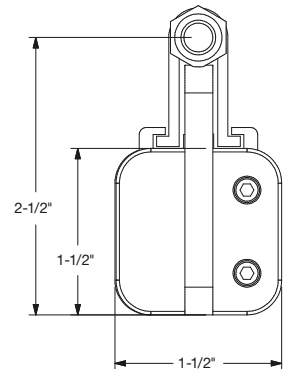

BETWEEN JAMBS GUIDE CONSTRUCTION OPTIONS

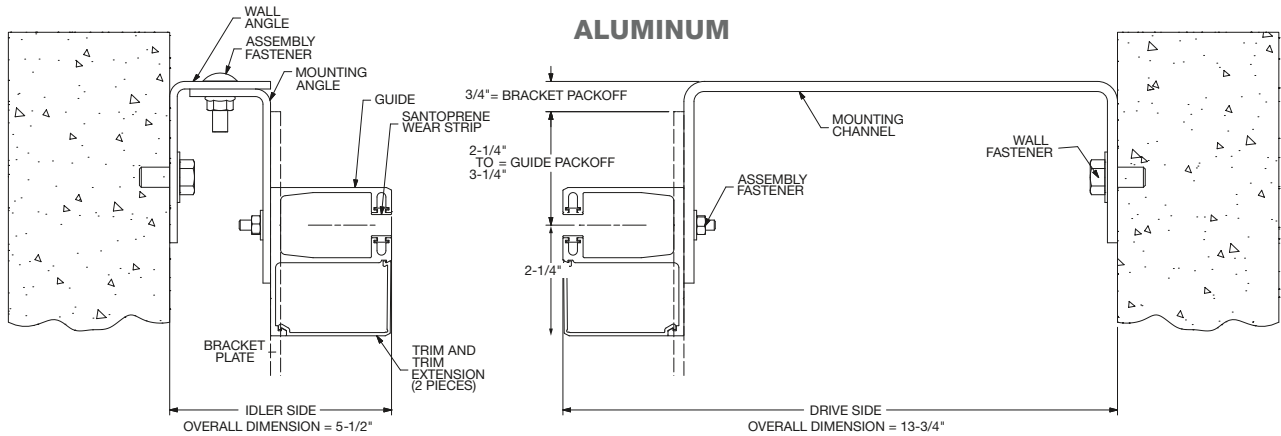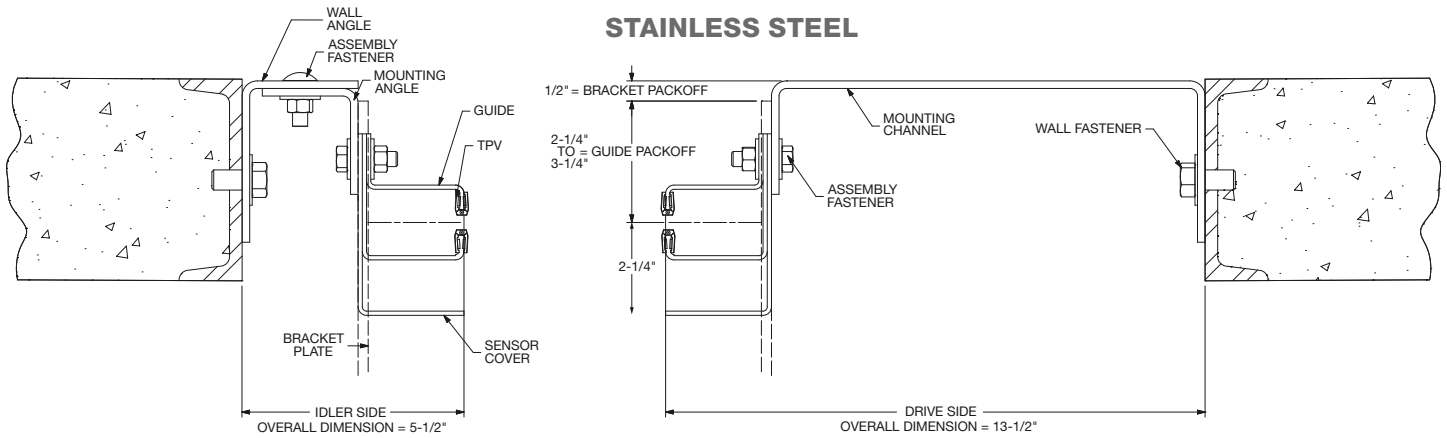

OPERATIONAL WIND LOAD LIMITS

STAINLESS STEEL

MAX. DBG	MAX. OPERATIONAL WIND LOAD (PSF)
12'	16
20'	12
26'	10

ALUMINUM

MAX. DBG	MAX. OPERATIONAL WIND LOAD (PSF)
12'	11
20'	10
26'	9

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.

