

ROLLING GRILLES

HEAVY-DUTY 5015 ROLLING GRILLE

CLOPAY COMMERCIAL – MODEL C5015



Model C5015 Door

HIGH-SECURITY, DEPENDABLE, ROBUST PERFORMANCE

SOLID CONSTRUCTION

The C5015 Rolling Grille curtain is built for the long haul. The curtain consists of solid rods that are spaced 25% closer than standard grille curtain construction. In addition, the links are 50% heavier with tube spacers on every rod, instead of every tenth rod. These upgrades make the curtain more secure and more durable than standard construction.

ENHANCED SECURITY

The C5015 grille's uniquely robust construction is ideal for applications with no secondary level of security, and is built to last for 50,000 cycles. For facilities requiring more cycles, the grille can be upgraded to include 100,000-cycle springs and a high-cycle shaft construction.

COMPACT & FULLY SUPPORTED

Like all of our rolling products, the C5015 curtain stores in an overhead coil that is totally supported by extensions of the side guides. This means there is no need for any additional support beams at the hood. The C5015 grille's coil is also compact, requiring less headroom than many standard rolling grilles.

VISIBILITY & AIRFLOW

The C5015 provides an enhanced level of security compared to standard grilles without sacrificing visibility and airflow. This grille is an excellent choice for retail applications requiring additional protection or parking garages in highly populated areas with standard cycle needs.

HEAVY-DUTY 5015 ROLLING GRILLE

STANDARD COMPONENT MATERIALS AND FINISHES

1. **BRACKETS** – Steel with powder coating in Gray. Bolt to guide assembly and support counter-balance shaft and curtain.
2. **COUNTER-BALANCE SHAFT** – Steel supports curtain and contains torsion springs for assisting operation.
3. **GUIDES** – Heavy-duty extruded aluminum in clear anodized finish.
4. **BOTTOM BAR** – Extruded aluminum in clear anodized finish.
5. **CURTAIN** – 3/16" thick aluminum links with 5/16" solid aluminum rods spaced 1-1/2" apart and 1/2" diameter composite tube spacers on every rod.

OPTIONAL MATERIALS AND FINISHES

- Aluminum in clear anodized finish
- Stainless steel 300 series in #4 finish
- SpectraShield® powder coating in more than 180 colors (not available on curtains)
- Hoods available as an option. Galvanized steel with exclusive GalvaNex™ polyester enamel finish in gray or SpectraShield® powder coating in more than 180 colors; aluminum in mill, clear and color anodized finish; or 300 series stainless steel with #4 finish by a larger opening width


OPERATION AND STRUCTURAL REQUIREMENTS

Motor, hand chain, hand crank and push-up options are available

This product is supported by a guide assembly attached to the jamb construction or structural tubes attached to either wall or overhead construction. No additional header support is required unless hood supports are mandated by a larger opening width.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.

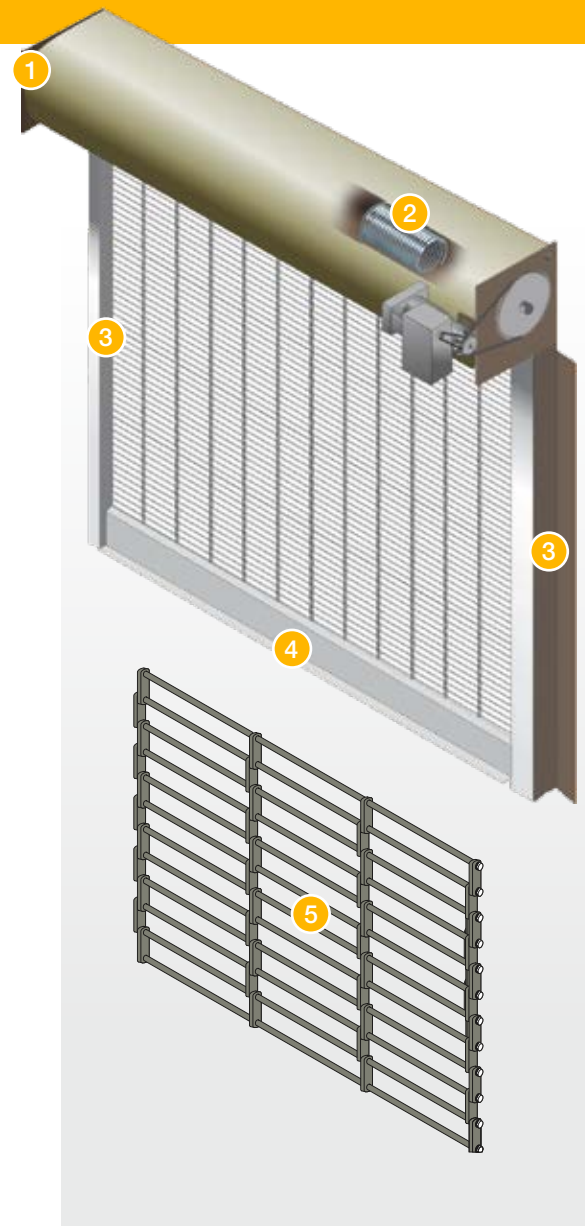

For more information on these and other Clipay products, visit clipaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clipay Corporation. All rights reserved.

